

EcoStar® 2009 LEED® v3

Majestic Slate

MR Credit 2 - Construction Waste Management

- Divert 50% from landfill – 1 pt.
- Divert 75% from landfill – 2 pts.

Examples:

- Reuse or redirect Board-stock Insulation such as:
 - Nail Board
 - Vent Board
 - Foam insulation boards
- If the existing EcoStar products are carefully removed, they can be reused.

MR Credit 3 - Materials Reuse

- Reuse 5% of materials – 1 pt.
- Reuse 10% of materials – 2 pts.

Examples:

- Reuse insulation if board stock
- If the existing EcoStar products are carefully removed, they can be reused.

MR Credit 4 - Recycled Content

- Use 10% recycled content – 1 pt.
- Use 20% recycled content – 2 pts.

Examples:

- Class A rated tile – 70% post-industrial recycled content
- Class C rated tile – 80% post-industrial recycled content


MR Credit 5 - Regional Materials

Based on cost of qualifying [local] materials as a percentage of overall material cost. Regional materials are those that are extracted, harvested, or recovered, as well as manufactured, within 500 miles of the project site.

- Use 10% regional materials – 1 pt.
- Use 20% regional materials – 2 pts.

Note: Projects outside the 500-mile radius – remember:

- 73% less weight than tile per sq. ft. – minimum
- 67% less weight than slate per sq. ft. – minimum
- Equal in weight to laminated shingles and shake per sq. ft.
- As seen above in specific cases, EcoStar's weight advantage equates to more square footage on a truckload requiring less trucks.

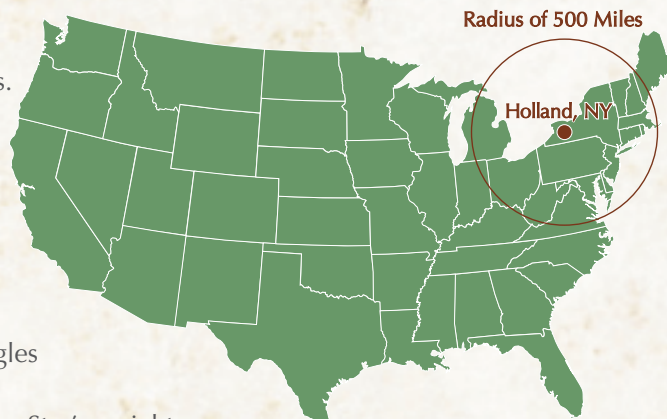

Traditional



Beaver Tail



Chisel Point



Beveled

Seneca Cedar Shake Tiles & Seneca Plus

